


TAYLORMADE DRAWN ARC STUDWELDING SYSTEM

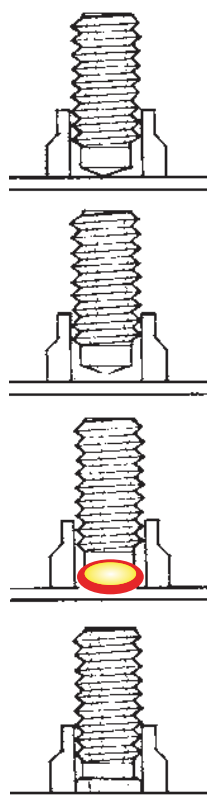

Taylor Studwelding Systems Limited is a specialist in the design, manufacture and supply of Studwelding equipment and studs. Within our range of British built equipment, we will have the system to suit your requirements.

SYSTEM i16

Compact, manoeuvrable Drawn Arc equipment designed to weld up to 16mm reduced base studs. With its simple robust construction, the i16 offers an economic and reliable method of fixing Mild Steel and Stainless Steel studs. Fast, accurate and easy to operate, the system i16 gives you better weld results.

Designed and built to exacting standards and meets all required standards, the System i16 is CE and UKCA marked.

TEL: +44 (0)1924 452123 | FAX: +44 (0)1924 430059
EMAIL: sales@taylor-studwelding.com | www.taylor-studwelding.com



A TAYLORMADE DRAWN ARC STUDWELDING SYSTEM TO WELD UP TO 16MM REDUCED BASE STUDS

TAYLOR STUDWELDING SYSTEMS LIMITED

Commercial Road, Dewsbury, West Yorkshire, WF13 2BD, England

TEL: +44 (0)1924 452123 | FAX: +44 (0)1924 430059 | EMAIL: sales@taylor-studwelding.com

www.taylor-studwelding.com

TAYLORMADE DRAWN ARC STUDWELDING SYSTEM



SYSTEM i16

CONTROLLER FEATURES

- Robust and compact design housing all components in one cabinet.
- Lightweight and portable.
- Stepless adjustment of welding current and time.
- Microcomputer controlled.
- Constant current regulation.
- i16 uses latest inverter technology.
- Solid state switching.
- Visual multi-functional display (12 languages).
- Self-diagnosis overheating, short circuit control, pilot arc malfunction.
- Gun lift test facility.
- Chuck saver circuit fitted.
- Fitted with gas facility.
- Welds in both standard and Short Cycle mode.
- Stud counter.

TECHNICAL SPECIFICATION

Model	i16
Welding stud range	3 - 14.6mm (M16 PD)
Input	3ph 400v 50/60Hz (other voltages available)
Fusing	32A
Max. KVA rating	35KVA (IDLING- 50W)
Welding current	100 - 1400 A
Welding time range	10 - 1000 m/sec
Welding rate	3 - 30 studs per minute
Class protection	IP 23
Cooling	Fan
Dimensions (L x W x H)(mm)	510 x 325 x 450 (Inc Handles)
Weight	34 kg

Model	DA2A	DA7B
Material	Verton	BAH Delrin
Welding range	3 - 16mm	3 - 12mm
Stud length	Standard legs - 100mm Extended legs - any length	Standard legs - 50mm Extended legs - any length
Cable length	5 metres	5 metres
Cable Size	50mm ²	35mm ²
Weight (inc cables)	5.4 kg	3.8 kg
Dimensions (L x W x H)(mm)	270 x 70 x 155	265 x 65 x 150

Model	DA8A
Material	Verton
Welding range	3 - 10mm
Stud length	Standard legs - 35mm Extended legs - any length
Cable length	5 metres
Cable Size	25mm ²
Weight (inc cables)	2.2 kg
Dimensions (L x W x H)(mm)	195 x 55 x 140

DA2A/DA7B HANDTOOL FEATURES

- Designed for lightness and balance.
- Comfortable to use, minimises operator fatigue.
- Made from impact resistant, high strength Verton / BAH Delrin.
- Accessories are available to solve specific problems.
- Extensions are available for both handtool and earth cables.
- Possible to weld up to 16mm reduced base Drawn Arc Studs

DA8A HANDTOOL FEATURES

- Lightweight, small fixed mini pistol.
- Used to weld Short Cycle Studs.
- Possible to weld up to 10mm standard Drawn Arc studs.
- Supplied to weld with gas if required.



Controller



DA2A



DA7B



DA8A



TAYLOR STUDWELDING SYSTEMS LIMITED

Commercial Road, Dewsbury, West Yorkshire, WF13 2BD, England

TEL: +44 (0)1924 452123 | FAX: +44 (0)1924 430059 | EMAIL: sales@taylor-studwelding.com

www.taylor-studwelding.com